

Profile® CoverGrow™ Technical Data

COMPOSITION

Wood Fiber	37%
Cellulose Fiber	58%
Tackifier	5%
(Seed not included)	

INSTALLATION

Hydroseeding:

Strictly comply with manufacturer's installation instructions and recommendations. Use approved hydro-spraying machines. Do not exceed maximum slope length of 35 feet (11 m) when slope gradients are steeper than 4H to 1V.

Add 60 pounds (27 kg) per 100 gallons (379 L) of water along with seed when hydroseeding; confirm loading rates with equipment manufacturer.

Slope Gradient/Condition	Rate
Flat to 5H:1V Slopes	1500 lb/ac (1680 kg/ha)
5H:1V to 4H:1V Slopes	2500 lb/ac (2800 kg/ha)
3H:1V Slopes	3000 lb/ac (3360 kg/ha)

Broadcast Spreading:


Strictly comply with manufacturer's installation instructions and recommendations. Prepare or rake the soil, spread the seed and apply CoverGrow. Recommend 36" drop spreader with a fixed rate plate. You may also spread by hand for spot or patch seeding. Do not exceed maximum slope length of 25 feet (7.6 m) when slope gradients are steeper than 4H to 1V.

Slope Gradient/Condition	Rate
Flat to 5H:1V Slopes	50 lb/1000 sq ft (22.7 kg/93 sq m)
5H:1V to 4H:1V Slopes	75 lb/1000 sq ft (34 kg/93 sq m)

PACKAGING

40-lb bags (18 kg)
48 bags per pallet

CoverGrow Mulching Granules give you
50 lbs. of coverage in a 40-lb. bag

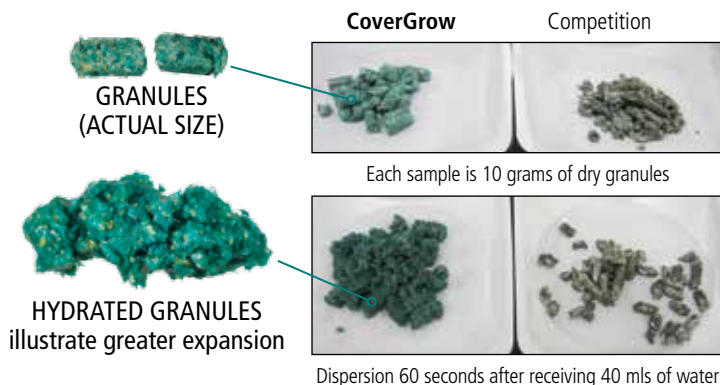

CoverGrow™ quickly and easily establishes vegetation no matter what your application method. It's the perfect solution for bare spots, dead patches, irregular shaped areas and roadside strips.

Distributed by:

Colonial
Construction Materials

800-436-6287
www.colonial-materials.com



© 2014 PROFILE Products LLC.
All rights reserved.

Profile and Seed Aide are registered trademarks of PROFILE Products LLC.
CoverGrow and Solutions for your Environment are trademarks of PROFILE Products LLC.

CGROW-13 2/14