

# SKAPS TRANSNET™

## HDPE GEONET TN 300



SKAPS TRANSNET™ geonet consists of SKAPS Geonet made from HDPE resin.


PROPERTY	TEST METHOD	UNIT	VALUE	QUALIFIER
Thickness	ASTM D 5199	mil	275	MAV <sup>(3)</sup>
Carbon Black	ASTM D 4218	%	2.0	MAV
Tensile Strength	ASTM D 7179	lb/in	65	MAV
Melt Flow	ASTM D 1238 <sup>(2)</sup>	g/10 min	1.0	Maximum
Density	ASTM D 1505	g/cm <sup>3</sup>	0.94	MAV
Transmissivity <sup>(1)</sup>	ASTM D 4716	gal/min/ft (m <sup>2</sup> /sec)	29.00 (6.0 x 10 <sup>-3</sup> )	MAV

**Notes:**

(1) Transmissivity measured using water at 21 ± 2 °C (70 ± 4 °F) with a gradient of 0.1 and a confining pressure of 10,000 psf between steel plates after 15 minutes. Values may vary with individual labs.

(2) Condition 190/2.16

(3) Minimum average value

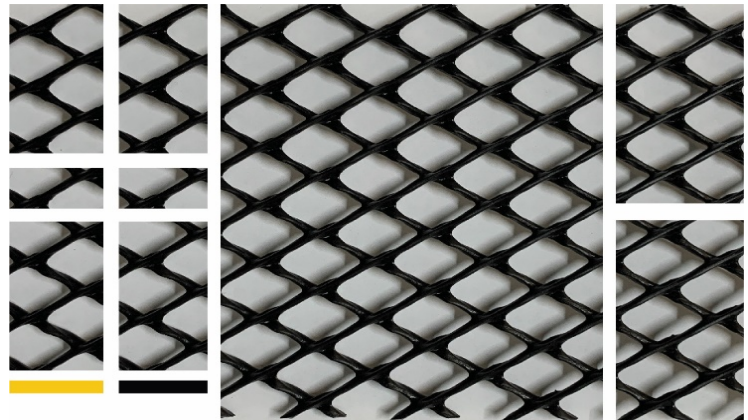

*This information is provided for reference purposes only and is not intended as a warranty or guarantee. SKAPS assumes no liability in connection with the use of this information.*