



J·DRAIN SWD

Site Water Drainage

APPLICATIONS: LAWNS, GARDENS, PLAYGROUNDS, ATHLETIC FIELDS, GOLF COURSES, SYNTHETIC TURFS, HORSE FARMS, AND LANDSCAPE.



REMOVING STANDING WATER IN YARDS AND LANDSCAPE THE EASY WAY!

J·DRAIN SWD is an effective method for removing standing water in many landscape applications without disrupting the surrounding areas by placing **SWD** in narrow trenches and backfilling with sand.

info@j-drain.com

www.j-drain.com

JDR Enterprises, Inc.

292 S. Main St., Suite 200 Alpharetta, GA 30009
(800) 843-7569 (770) 442-1461



SWD

Site Water Drainage



LOCATE AND DIG TRENCHES



INSTALL AND TAPE FITTINGS



T-CONNECTOR DETAIL



END CONVERSION TO PIPE



SPLICING DETAIL



END CAP FITTING





INSTALLING INTO TRENCH




TEMP. STAKES FOR CENTERING




INSTALLING SAND BACKFILL

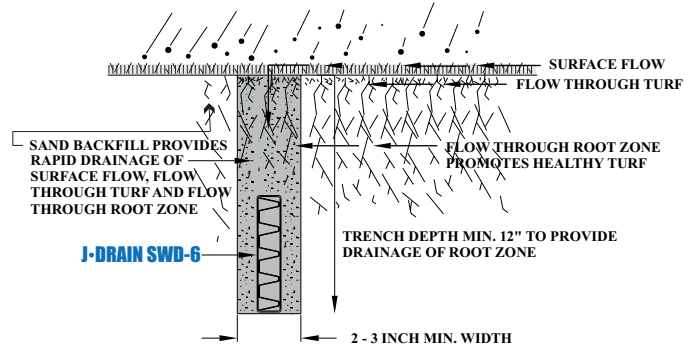


ENDOUT

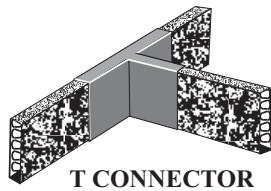

T CONNECTOR



SPLICE



END CAP (6\"/>



SYNTHETIC TURF INSTALLATIONS:

VERY COST EFFECTIVE: ELIMINATES ALL TRENCHES ACROSS FIELD WHILE SPEEDING UP CONSTRUCTION TIME AND REDUCING INSTALLATION COST.



NATURAL TURF INSTALLATIONS:

VERY COST EFFECTIVE: NARROW, SHALLOW TRENCHES CAN BE LAID FOR A FRACTION OF THE COST OF PIPE AND GRAVEL FILLED TRENCHES. LESS INTRUSIVE TO PLAYING AREA.




PLAYGROUND INSTALLATIONS:

VERY COST EFFECTIVE: ELIMINATES ALL TRENCHES UNDER PLAYGROUND AND PROVIDES RAPID DRAINAGE, SAVING CONSTRUCTION TIME AND MONEY.



GOLF COURSE INSTALLATIONS:

VERY COST EFFECTIVE: NARROW, SHALLOW TRENCHES CAN BE LAID FOR A FRACTION OF THE COST OF PIPE AND GRAVEL FILLED TRENCHES. CAN BE INSTALLED QUICKLY WITH LESS DAMAGE TO AREA.

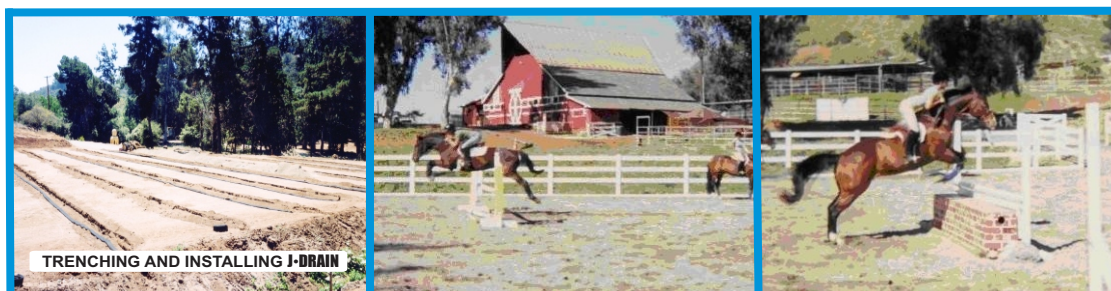

HORSE FARM INSTALLATIONS:

VERY COST EFFECTIVE: NARROW, SHALLOW TRENCHES CAN BE LAID FOR A FRACTION OF THE COST OF PIPE AND GRAVEL FILLED TRENCHES. SURFACE DRYING TIME GREATLY REDUCED.


J·DRAIN

JDR




INSTALLATION PROCEDURE:

1. Determine drainage layout. Mark field or drainage area with a chalk line at trench locations.
2. Excavate trenches 2" - 3" (33 - 105 mm.) wide and to a depth so that the top of the **J-DRAIN SWD** is 6" below the turf surface.
3. Unroll and place **J-DRAIN SWD** into trench centering with temporary wood stakes. Install proper fittings and tape fittings in place. Use a select backfill such as washed concrete sand.
4. Remove temporary stakes and flood trench with water to promote proper compaction.
5. Top off trench with sand and replace sod.

TYPICAL DRAINAGE LAYOUTS FOR J-DRAIN SWD

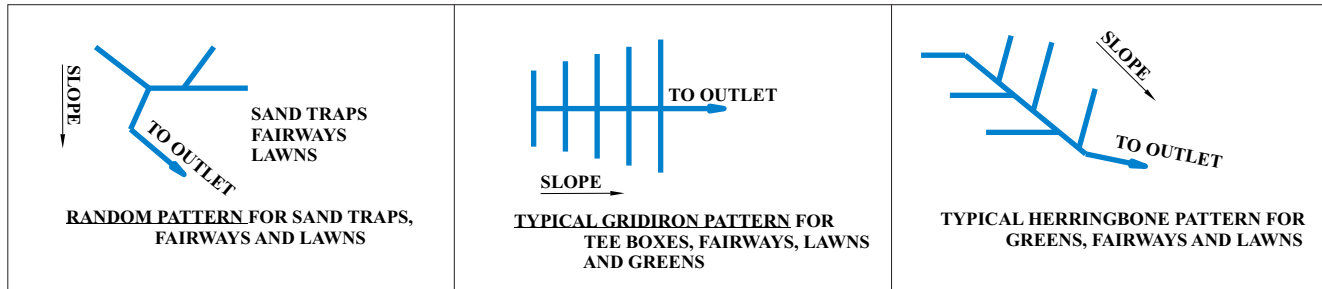

TYPICAL ATHLETIC FIELD DRAINAGE LAYOUT

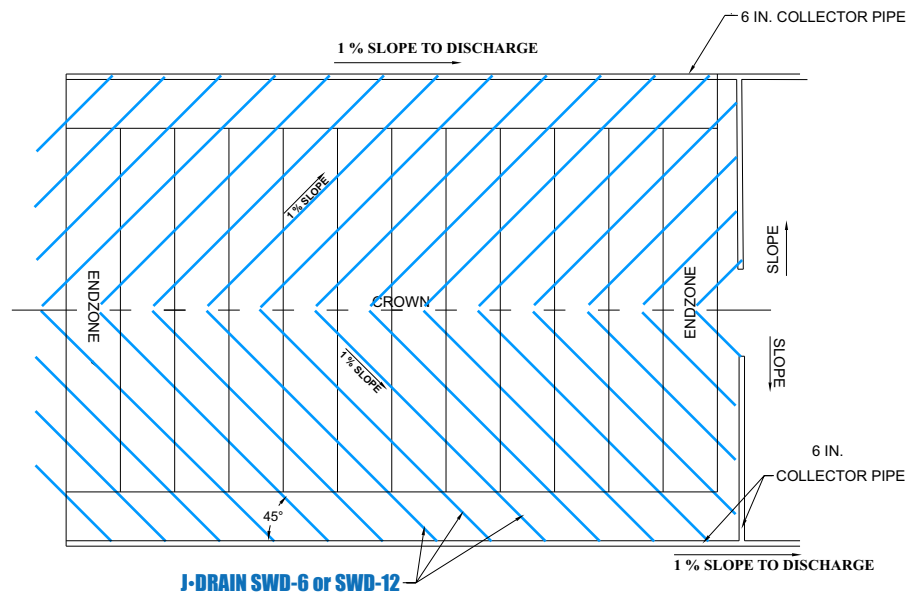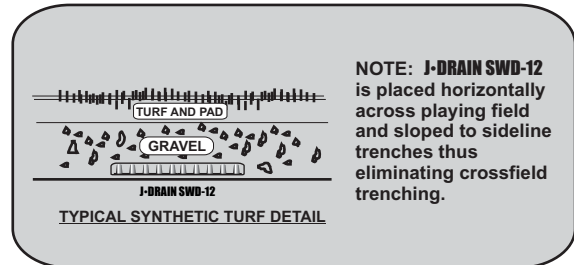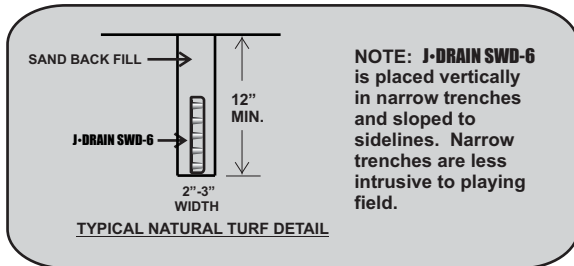

Core

Compressive Strength (ASTMD-1621)	9,500 psf	(455 kN/m ²)
Thickness (ASTM-1777)	1 in.	(2.54 cm.)
In-Plane Flow (ASTMD-4716)	30 gpm/ft width	(372 lpm/m)
(Q&518 psf & Hydraulic gradient = .1)		

Physical Properties

Roll	Roll Weight:	38, 68, 83, 98, & 128 lbs.	(17, 30, 37, 44, & 57 kgs.)
	Roll Width:	6", 12", 18", 24", & 36"	(15, 30, 38, 45, & 60 cm.)
	Roll Length:	165 ft. / 300 ft.	(50.29 / 91.44 meters)

Fabric

Flow (ASTM D-4491)	140 gpm/ft ²	(5704 lpm/m ²)
CBR Puncture (ASTM D-6241)	250 lbs.	(1.11 kN)
AOS (ASTM D-4751)	70 U.S. Sieve	(.212 mm)
Grab Tensile (ASTM D-4632)	100 lbs.	(.45 kN)
Permittivity (ASTM D-4491)	2.0 sec ⁻¹	
U.V. Resistance (ASTM D-4355)	70% @500 hrs.	

The information contained herein is believed by JDR Enterprises, Inc. to be accurate and is offered solely for the customer's consideration, investigation and verification. Determination of suitability for use is the responsibility of the user. JDR's Limitations, Limited Warranty, & Disclaimer along with Standard Terms & Conditions apply. See www.j-drain.com for more info. Limitations: J-DRain is resistant to chemicals in normal soil environments. However, some reagents may affect the performance of J-DRain. A JDR representative should be contacted for further information to determine the suitability of use of J-DRain in unusual soil environments. J-DRain should be limited to its exposure to ultra-violet sunlight. J-DRain should be backfilled or covered within seven days of installation. Disclaimer: All information, drawings and specifications are based on the latest published information at the time of printing. JDR reserves the right to make changes due to manufacturing improvements and engineering at any time. All physical properties are minimum average roll values (MARV). Standard variations of 10% in mechanical properties and 15% in hydraulic properties are normal.

info@j-drain.com

www.j-drain.com